



Affordable & reliable medical supplier for worldwide scale

Shantou Easywell Electronic Technologies Co., Ltd  
Minston International Co., Ltd.

86-13592859219



86-754-88481863



86-754-88481864



Danson



minstonexport@aliyun.com  
manager@medical-equipment-cn.com



<https://easywell-light.en.alibaba.com/>  
<https://ew-surgical-light.en.made-in-china.com/>

CE RoHS FCC FSC

**MEDICAL** Procedure Lights

**LED** Magnifying Lights

**LED** Reading Lights

**KS Series**



# Halogen Spot Exam and Medical Procedure Light

**Model: KS-Q35 /KS-Q50**

color of outer-shell



Traditional and the most popular medical spot examination lamp with the handle on the lamphead, integrated with the switcher.

Famous brand 35W halogen bulb and also high output 50W halogen bulb is option

Multi-optional mounted type is ideal for all application, provides stable and manoeuvrable positioning.

Goose neck arm ensures the light is easy to move and position and does not drift. NO dead-angle examination and long reach range is presented.

Focusable light ideal for illumination in restricted areas with minimal glare


Easy bulb replacement-- only single open the front cover of lamphead and change the bulb in seconds.



Warm white color temperature Setting is ideal for the dermatological examinations



| Technical Data         | KS-Q35/Q50  |
|------------------------|---|
| Light Intensity        | 40,000 Lux @ D=30cm / 10,000 Lux @ D=50cm                                 |
| Control System         | stepless brightness dimmer control and switcher intergrated in the handle |
| Flexiable arm          | 76cm length flexiable plastic sleeve goose neck                           |
| Lamphead               | Diameter=75mm length =110mm   |
| Diameter of Light Spot | 140-190mm @ D=30-50cm   |
| Light source           | 1x Halogen bulb   |
| LED life span          | 2,000 hours   |
| Color Temperature      | 3000K-3500K   |
| Input Connected Load   | 220-240V (standard) / 110V (option) 50/60MHz                              |
| Power consumption      | 35W (KS-Q35) / 50W(KS-Q50)  |
| Class of Protection    | Class II  |
| Mounting Options       | Mobile, Table, Wall& Rail   |

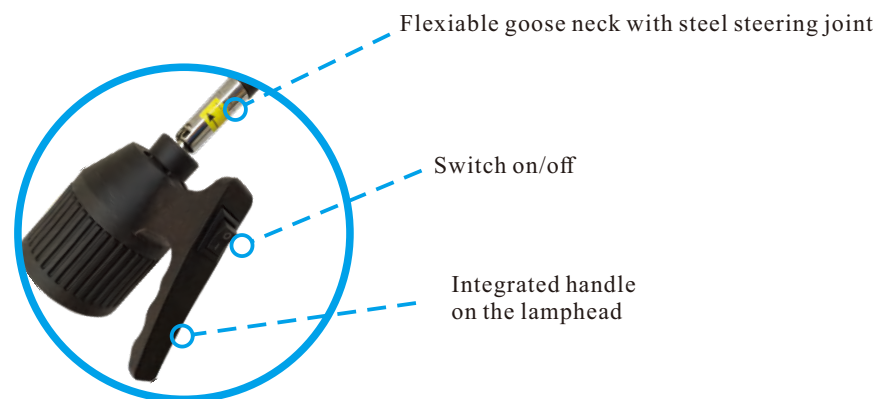

## Application:

Pre and post operative wards  
Recovery areas  
Emergency room  
Gynaecology  
Minor surgery  
Closed examinaiton  
Consulting rooms and clinics




## LED Spot Exam Light

+ The economic, compact, focused, flexible light

color of outer-shell



**Model: KS-Q3**



**Dimmer control**

Stepless brightness control

+ Ultra-high brightness from a nutshell with a on/off handle

+ Multi-functional control systems provides the attractive performance

+ A selectable range of mounted brackets are installed on the floor, wall, surgical table, desk, rail

+ Meet hygienic and cleaning requirements via spray disinfection

Traditional and the most popular medical spot examination lamp with the handle on the lamphead, integrated with the switcher.

Extended handle for facilitating position of light

IR-free technology from LED light source reduces the sensation of heat for the patient and doctor

LED service life 40 times longer than Halogen bulb

Low energy consumption : 1/3 less than conventional Halogen system

Tissue do not dry up as rapidly during the intervention under very low radiation from the light


KS-Q3 provides “daylight” illumination for truer tissue color rendition and easier diagnosis and treatment.

Articulated arm ensures the light is easy to move and position and does not drift. NO dead-angle examination and long reach range is presented.


Ideal for GP practices, E.N.T., Ophthalmology, Gynaecology , small theatre, minor operations and other surgery use.




| Technical Data          | KS-Q3/Q3D/Q3S/Q3B   |              |
|-------------------------|---|--------------|
| Light Intensity         | 100,000 Lux @ D=30cm / 40,000 Lux @ D=50cm                                |              |
| Control System (KS-Q3)  | stepless brightness dimmer control and switcher intergrated in the handle |              |
| Control System (KS-Q3D) | digital light-touch control and switcher intergrated in the handle        |              |
| Control System (KS-Q3S) | touchless control and switcher intergrated in the handle                  |              |
| Flexiable arm           | 76cm length flexiable plastic sleeve goose neck                           |              |
| Lamphead                | Diameter=75mm length =110mm   |              |
| Diameter of Light Spot  | 80-150mm @ D=30-50cm  |              |
| Light source            | 1x LED bulb   |              |
| LED life span           | 50,000 hours  |              |
| Color Temperature       | 4500K-5500K   |              |
| Input Connected Load    | 100-260V 50/60MHz   |              |
| Power consumption       | 3W  |              |
| Class of Protection     | Class II  |              |
| Mounting Options        | Mobile, Table, Wall& Rail   |              |
| Battery type (KS-Q3B)   | 1800mAh   | 8 hours work |

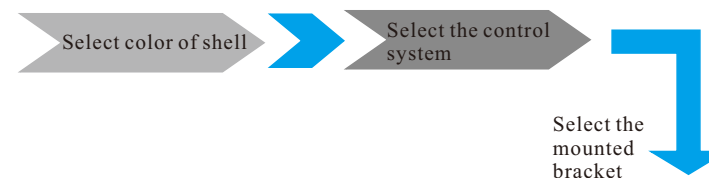

### Standard Fitting (Mobile)



### Option (Mobile)



### Top part+vertical stand+ABS base






|               |                                 |
|---------------|---------------------------------|
| Code of base  | ABS01Black or ABS02 white       |
| Material:     | Integrated plastic              |
| Castors       | D=50mm with 5 brake             |
| Data of base  | D=53cm 5 branches 1.2kgs        |
| Vertical pole | 85cm length powder coated steel |

|               |                                 |
|---------------|---------------------------------|
| Code of base  | DM01 Black or White             |
| Material:     | Powder coated steel             |
| Castors       | D=50mm with 5 brake             |
| Data of base  | D=58cm 5 branches 3.35kgs       |
| Vertical pole | 85cm length powder coated steel |

| Wall Mounted Clamp |            |
|--------------------|------------|
| Code               | WM01       |
| Material:          | Alluminium |
| Plug-in hole       | D=22mm     |

| Rail Mounted Clamp |            |           |
|--------------------|------------|-----------|
| Code               | RC01       | RC02      |
| Material:          | Alluminium |           |
| Clamp size max     | 34x9.5 mm  | 80x9.5 mm |
| Plug-in hole       | D=22mm     | D=22mm    |

| Table Clamp  |            |
|--------------|------------|
| Code         | TC01       |
| Material:    | Alluminium |
| Plug-in hole | D=22mm     |

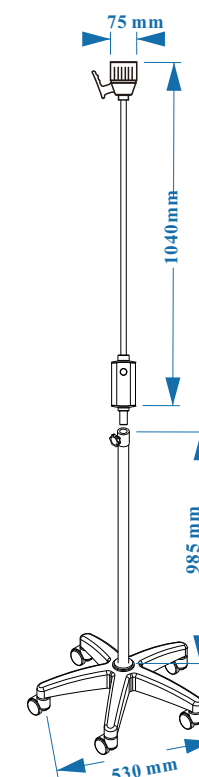

**Model: KS-Q3D**

**Light touch Digital Control**

Touching to switch on/off  
Touching to light up/down  
Emergency power supply

**Model: KS-Q3B**

Plastic five star base  
with lockable casters  
Code: ABS02 (Standard)

Detachable steel base  
with lockable casters  
Code: DM01 black  
(option)



**Model: KS-Q3S**

**Touchless digital control**

Hand sensitive to switch on/off  
Hand sensitive to light up/down

Detachable steel base  
with lockable casters  
Code: DM01 white  
(option)

Plastic five star base  
with lockable casters  
Code: ABS01  
(Standard)



## LED Spot-adjusted Exam Light



● **Model: KS-Q5**  
**Dimmable (3W/5W)**

color of outer-shell



- + Hard anodizing of full aluminum alloy lamphead is to improve corrosion resistance, wear resistance, weather resistance, insulation.

- + Precision multiple lens optical system provide homogeneous illumination and clearly defined light spot.

- + Spot size is adjusted by inner mini light grating system with Zoom circle on the lamphead

- + Super long 100cm flexible plastic coated goose neck ensure the no-dead angle and manoeuvrable positioning

- + Standard dimmer control ,with other optional gesture controls and battery make the control more comfortable and efficient.

- + The floorstand (DM01 or ABS01), wall mounting (WM01), Table clamp(TC01) for tighter spaces;  
Rail mounted bracket(RC01 or RC02) that can be attached to a bed rail ,wall rail, or surgical table rail.

- + Standard detachable powder coated steel base(DM01) with 5xAntistatic and lockable plastic casters or option with plastic base (ABS01)



By adopting multilayer film optics technology, KS-Q5 series LED spot examination lamp gathers and enlarges through optics, making common of giving out light effect to become clearly and light spot even high-quality light flat surface effect. It is extensively applied in the industry, medical, treatment, jewelry, photograph, scientific research etc.,It is currently more advanced lighting equipments at home and abroad

● **Model:KS-Q5-3D 3W**  
**KS-Q5-5D 5W**

Digital light-touching control




● **Model:KS-Q5-3B 3W**  
**KS-Q5-5B 5W**

Digital light-touching control  
with battery inside

● **Model:KS-Q5-3S 3W**  
**KS-Q5-5S 5W**

Touchless intensity

Sensitive detection  
range is 3-5 cm to  
avoid hands contact.

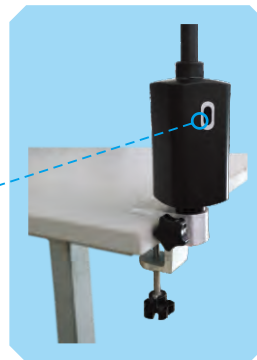

| Technical Data               |   |              |
|------------------------------|---|--------------|
| Light Intensity              | 35,000 Lux @ D=30cm / 15,000 Lux @ D=50cm       |              |
| Control System (KS-Q5)       | stepless brightness dimmer control              |              |
| Control System (KS-Q5-3D/5D) | digital light-touch control                     |              |
| Control System (KS-Q5-3S/5S) | touchless control                               |              |
| Flexible arm                 | 100cm length flexible plastic sleeve goose neck |              |
| Lamphead                     | Diameter=25mm length =130mm handle: 80mm length |              |
| Diameter of Light Spot       | 70-150mm @ D=30cm Variable                      |              |
| Light source                 | 1x LED bulb                                     |              |
| LED life span                | 50,000 hours                                    |              |
| Color Temperature            | 4800K-6000K                                     |              |
| Input Connected Load         | 100-260V 50/60MHz                               |              |
| Power consumption            | 5W  |              |
| Class of Protection          | Class II  |              |
| Mounting Options             | Mobile, Table, Wall& Rail                       |              |
| Battery type (KS-Q5-3B/5B)   | 1800mAh   | 8 hours work |

## LED Focus-adjusted Exam Light



● **Model: KS-Q5N**  
**Dimmable**

color of outer-shell



A longer arm (100cm) system ensure that either light can be positioned in the widest range,making it ideal for examination applications.


Designed to meet the most demanding healthcare facility's specifications for high-intensity,cool operation and low cost

Extremely smooth focus with positioning by the full alluminium alloy lamphead and zoom control system

Natural white light that is so important for an accurate examination whether your practice is obstetrics, gynecology, dermatology or emergency medicine

Versatile and efficient control system, including dimmer, light-touch, battery back up and touchless.

The floorstand (DM01 or ABS01), wall mounting (WM01), Table clamp(TC01) for tighter spaces; Rail mounted bracket(RC01 or RC02) that can be attached to a bed raid ,wall rail, or surgical table rail.

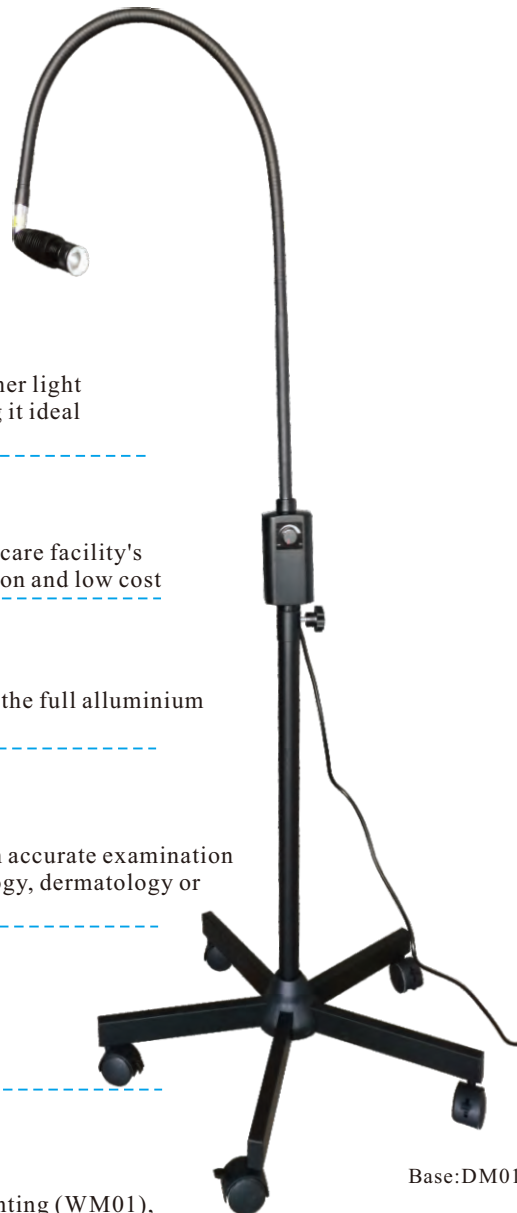

Base:DM01

A compact focusable light KS-Q5N ideal for illumination in restricted areas with minimal glare, higher illumination and long flexible arm provide no dead-angle examination and long reach range. Infinite range of movement to ensure correct angle, direction and intensity of beam

| Technical Data             |  |              |
|----------------------------|--|--------------|
| Light Intensity            | 150,000 Lux @ D=30cm / 80,000 Lux @ D=50cm       |              |
| Control System (KS-Q5N)    | stepless brightness dimmer control               |              |
| Control System (KS-Q5N-3D) | digital light-touch control                      |              |
| Control System (KS-Q5N-3S) | touchless control                                |              |
| Flexiable arm              | 100cm length flexiable plastic sleeve goose neck |              |
| Lamphead                   | Diameter=33mm length =114mm                      |              |
| Diameter of Light Spot     | 50-200mm @ D=30cm Variable                       |              |
| Light source               | 1x LED bulb                                      |              |
| LED life span              | 50,000 hours                                     |              |
| Color Temperature          | 4800K-6000K                                      |              |
| Input Connected Load       | 100-260V 50/60MHz                                |              |
| Power consumption          | 5W   |              |
| Class of Protection        | Class II   |              |
| Mounting Options           | Mobile, Table, Wall& Rail                        |              |
| Battery type (KS-Q5N-3B)   | 1800mAh  | 8 hours work |

● **Model:KS-Q5N-3D**

Digital light-touching control

● **Model:KS-Q5N-3B**

Digital light-touching control  
with battery inside

● **Model:KS-Q5N-3S**

Touchless intensity



Sensitive detection  
range is 3-5 cm to  
avoid hands contact.



OptionalBase:  
ABS01


## LED Medical Procedure Light



KS-Q6 Seires provides “daylight” illumination for truer tissue color rendition and easier diagnostis and treatment.

Articulated arm ensures the light is easy to move and position and dose not drift. NO dead-angle examination and long reach range is presented.

Full alluminium lamphead integrated handle , smooth and continuous surfaces are easy to wipe clean.



Standard dimmer control ,with other optional gesture controls and battery make the control more comfortable and efficient.

Application: general medical examinations and treatment in medical practices, dermatological examinations , wound care and minor surgical procedures, etc.

A selectable range of mounted brackets are installed on the floor, wall, surgical table, desk, rail

Standard detachable powder coated steel base(DM01) with 5xAntistatic and lockable plastic casters

| Technical Data          |  |                   |
|-------------------------|--|-------------------|
| Light Intensity         | 100,000 Lux @ D=30cm / 45,000 Lux @ D=50cm<br>20,000 Lux @ D=100cm |                   |
| Control System (KS-Q6)  | stepless brightness dimmer control                                 |                   |
| Control System (KS-Q6D) | digitial light-touch control                                       |                   |
| Control System (KS-Q6S) | touchless control  |                   |
| Flexiable arm           | 76cm length flexiable plastic sleeve goose neck                    |                   |
| Lamphead                | Diameter=80mm handle length =68mm                                  |                   |
| Diameter of Light Spot  | 70mm @ D=30cm 80mm @ D=50cm 200mm @ D=100cm                        |                   |
| Light source            | 6x LED bulbs with alluminium PCB and lens                          |                   |
| LED life span           | 50,000 hours   |                   |
| Color Temperature       | 4800K-5500K  |                   |
| Input Connected Load    | 100-260V 50/60MHz  |                   |
| Power consumption       | 10W  |                   |
| Class of Protection     | Class II   |                   |
| Mounting Options        | Mobile, Table, Wall& Rail  |                   |
| Battery type (KS-Q6B)   | 850mAh   | 3-8 hours working |



Wall mounted (WM01) that can be attached to , wall or electric exam table.

Rail mounted bracket(RC01 or RC02) that can be attached to a bed raid , wall rail, or surgical table rail.



Plastic five star base with lockable casters Code: ABS01 (Option)



**Urgent Care minor surgery services.**  
Outpatient, your done.

The light intensity can be altered through different control systems providing a suitable level of intensity for all procedures.

### Model: KS-Q6S

**Touchless digital control**



Hand sensitive to switch on/off  
Hand sensitive to light up/down

### Model: KS-Q6D

**Light touch Digital Control**



Touching to switch on/off  
Touching to light up/down  
Emergency power supply


### Model: KS-Q6B

Select color of shell





Select the control system

Select the mounted bracket

### Standard Fitting (Mobile)



### Option (Mobile)




### Top part+vertical stand+detachable steel base

|               |  |
|---------------|--|
| Code of base  | DM01 Black or White  |
| Material:     | Powder coated steel  |
| Castors       | D=50mm with 5 brake  |
| Data of base  | D=58cm 5 branches 3.35kgs  |
| Vertical pole | 85cm length powder coated steel<br>option:74 length stainless steel<br>adjusted pole |


|               |                                 |
|---------------|---------------------------------|
| Code of base  | ABS01Black or ABS02 white       |
| Material:     | Integrated plastic              |
| Castors       | D=50mm with 5 brake             |
| Data of base  | D=53cm 5 branches 1.2kgs        |
| Vertical pole | 85cm length powder coated steel |

| Wall Mounted Clamp |            |
|--------------------|------------|
| Code               | WM01       |
| Material:          | Alluminium |
| Plug-in hole       | D=22mm     |

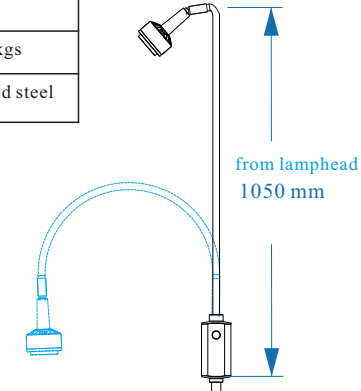

| Rail Mounted Clamp |            |           |
|--------------------|------------|-----------|
| Code               | RC01       | RC02      |
| Material:          | Alluminium |           |
| Clamp size max     | 34x9.5 mm  | 80x9.5 mm |
| Plug-in hole       | D=22mm     | D=22mm    |

| Table Clamp  |            |
|--------------|------------|
| Code         | Tc01       |
| Material:    | Alluminium |
| Plug-in hole | D=22mm     |





## LED Medical Procedure Light

color of outer-shell

KS-Q7 bring high performance with its unprecedented high-class brightness, efficacy, lifetime and quality. 360° flexible goose neck arms ensures the light is easy to move and position and does not drift.

**Model: KS-Q7**

Full strong plastic housing make the cleaning process easier and improving the hygiene conditions.

Integrated handle allow to direct the light from every position, both frontally and laterally.

Light intensity adjustable by means of digital key-pad control on the lamphead

- Intensive care/Recovery Room
- Examination/Treatment room
- Minor surgery/Emergency room
- Gynecology/Obstetrics

Standard detachable powder coated steel base(DM02) with 5pcs luxury Antistatic and lockable plastic casters




## LED Procedure Lamp




### Technical Data


|                          |   |
|--------------------------|---|
| Light Intensity          | 180,000 Lux @ D=30cm / 100,000 Lux @ D=50cm<br>20,000 Lux @ D=100cm |
| Control System           | digital key-pad control on the lamphead                             |
| Flexiable arm (KS-Q7)    | 76cm length flexiable plastic sleeve goose neck                     |
| Flexiable arm (KS-Q7E)   | 94cm length articulated steel spring arm                            |
| Lamphead                 | Diameter=89mm   |
| Diameter of Light Spot   | 90mm @ D=30cm 120mm @ D=50cm 200mm @ D=100cm                        |
| Light source             | 7x LED bulbs with alluminium PCB and lens                           |
| LED life span            | 50,000 hours  |
| Color Temperature        | 3500K-5000K   |
| Color Rendition Index Ra | 86  |
| Input Connected Load     | 100-260V 50/60MHz   |
| Power consumption        | 15W   |
| Class of Protection      | Class II  |
| Mounting Options         | Mobile, Table, Wall& Rail( plug hole:22mm Q7 / 12mm Q7E)            |

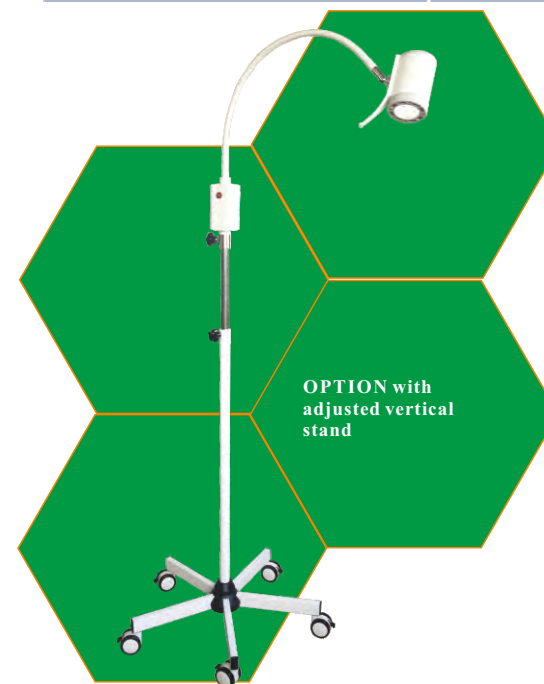

OPTION with  
adjusted vertical  
stand

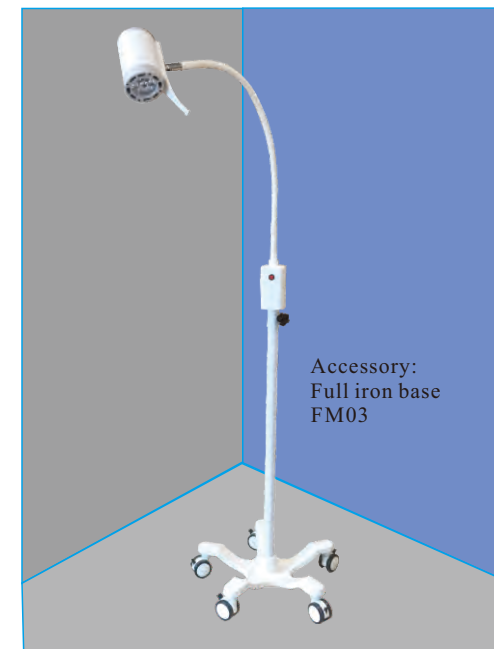

Accessory:  
Full iron base  
FM03




## LED Procedure Lamp









Minor surgical light

Model: KS-Q7E

KS-Q7E adopt the elegant articulated spring-balance arm, can be adjusted simply and exactly by the user and provided with a combined universal adapter.

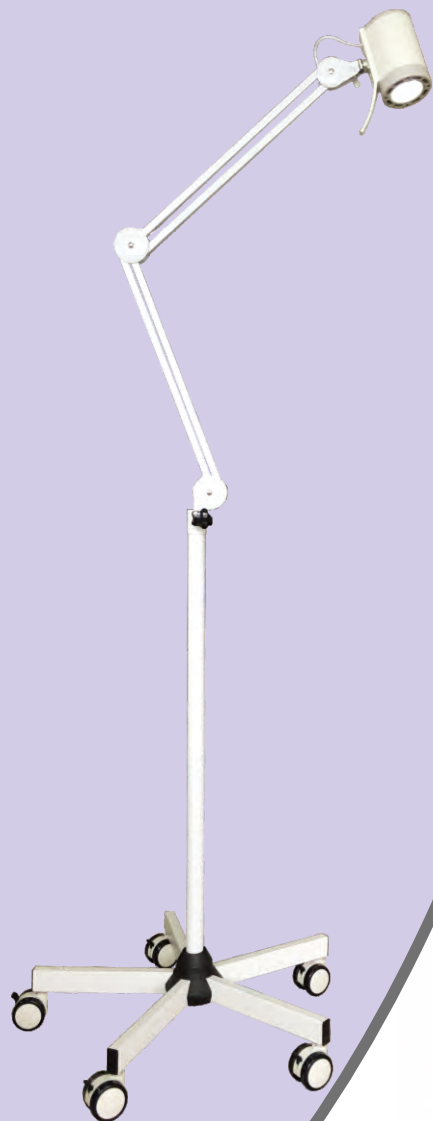

Lamp installation on bedhead

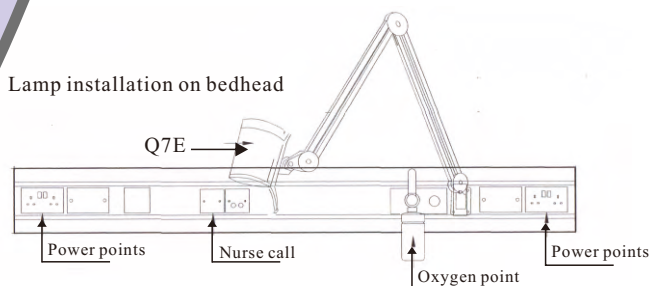

### Standard Fitting (Mobile)

|               |  |
|---------------|--|
| Code of base  | DM02 White                                 |
| Material:     | Powder coated steel                        |
| Castors       | D=60mm with 5 brake                        |
| Data of base  | D=58cm 5 branches 3.35kgs                  |
| Vertical pole | 85cm VP8522(Q7)/VP8512(Q7E)                |
| Option        | Inner stainless steel pole 74cm length S01 |




### Optional mountings

|               |   |
|---------------|---|
| Code of base  | FM03 White  |
| Material:     | Powder coated full iron fixed   |
| Castors       | D=60mm with 5 brake   |
| Data of base  | D=48cm 5 branches 8kgs  |
| Vertical pole | 85cm VP8522/VP8512, option inner stainless steel pole 74cm length S01 |

| Wall Mounted Clamp |                     |
|--------------------|---------------------|
| Code               | WM01(Q7)/WM03 (Q7E) |
| Material:          | Alluminium          |
| Plug-in hole       | D=22mm/12mm         |

| Rail Mounted Clamp |            |           |
|--------------------|------------|-----------|
| Code               | RC01/R03   | RC02      |
| Material:          | Alluminium |           |
| Clamp size max     | 34x9.5 mm  | 80x9.5 mm |
| Plug-in hole       | D=22mm/12  | D=22mm    |

| Table Clamp  |             |
|--------------|-------------|
| Code         | TC01/TC03   |
| Material:    | Alluminium  |
| Plug-in hole | D=22mm/12mm |

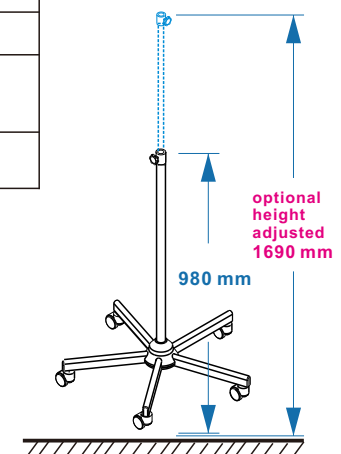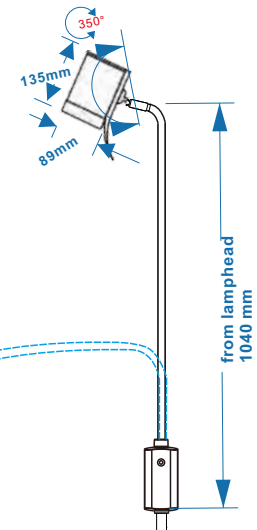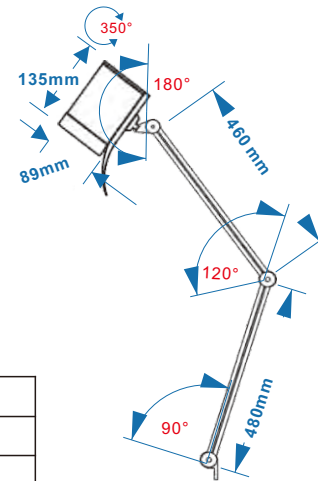

## LED Magnifier Lamp



**MODEL:  
KS-1088**

KS-1088 applies ergonomic perfection to support highly demanding visual tasks. With the latest LED's, innovative arm technology and a visual field designed for optimum performance, the KS-1088 illuminated magnifier combines high efficiency with ergonomic design.

Being able to easily position the lenses and light exactly where needed is an significant time-saver

Energy-saving LED technology provides distortion-free clarity without glare, hot spots or color degradation

Adjustability and remounting ease assure task-specific convenience

**3200-3500 Kelvin**

**3600-4200 Kelvin**

**4300-6000 Kelvin**



**2 in 1**

5x/10x magnifier  
lamp

Dermatology

Skincare

plastic  
surgery

Beauty




### Technical data

Voltage: 110-240v, 50Hz  
magnifier: 5X and 10X in one lamphead  
Light specification: 36 LEDs (12w)  
Brightness control: digital 10 grades  
Color temperature function: adjustable  
Soft light: 3200-3500 Kelvin  
Bright light: 3600-4200 Kelvin  
Daylight: 4300-6000 Kelvin

### LED Magnifying Lamp(Round)

Model: **1081D** Mobile type  
Lightsource: 120 LEDs  
Diameter of lamphead: 23cm  
Size of len: 5 inch (127mm)  
Magnification: 5X  
Power consumption: 15-18W  
Cover: lamphead with cover  
Base: Detachable five branches base

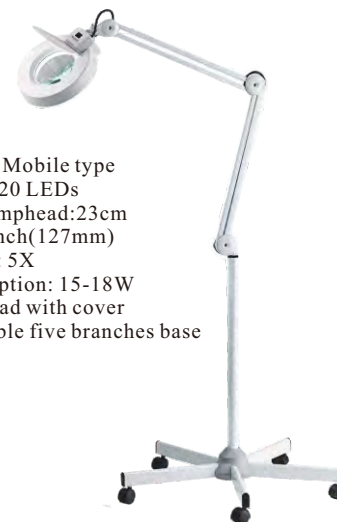

### LED Magnifying Lamp(Rectangular)

Model: **1081M** Mobile type  
Lightsource: 24 LEDs  
Size of lamphead: 20x28cm  
Size of len: 5.2X7 inch (132X180mm)  
Magnification: 5X  
Power consumption: 12W  
Cover: lamphead with cover and handle  
Base: Detachable five branches base



### Infrared therapy lamp (Model: **1082T**)

Technical data:  
Voltage: 220-240V, 50/60Hz  
Power: 100W/150W  
Lamp bulb : R95 interface type: E27  
Shell: Flameresistant material from Japan  
Cable length: 1.8m  
Package: 30pcs/carton



### Infrared thermo-regulated therapy lamp (Model: **1082B**)

Technical data:  
Voltage: 220-240V, 50/60Hz  
Power: 275W  
Temperature regulation: adjustable  
Timing: adjustable  
Lamp holder: E27





# LED Reading Lamp

SL-D7



Thanks to intuitive operation it's easy for daily usage, adapting to the user's needs. Additional flexibility is provided by its beny goose neck and rotating luminaire head which makes it really simple to position

Silver-gray alluminium housing with transparent cover has an elegant effect and harmonizes with any interior design.

Handle on the lamphead and cord switch allows for easy position and operation.



The large light field makes for relaxed reading with a pleasant light color

Dark room indication light integrated in the cord switcher.

9V DC connector is plugged to the end of tube and locked easily

Standard  
Wide power range of plug adaptor  
with USB port

Option:  
12-40V DC adaptor  
Small pin is positive  
Big pin is negative

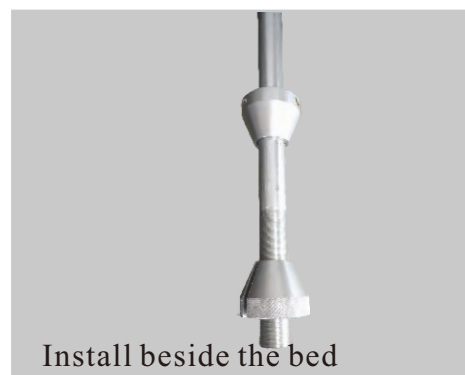

Install beside the bed




Install with rail clamp



DESIGN AND AESTHETICS  
IN PERFECTION.

SL-D7

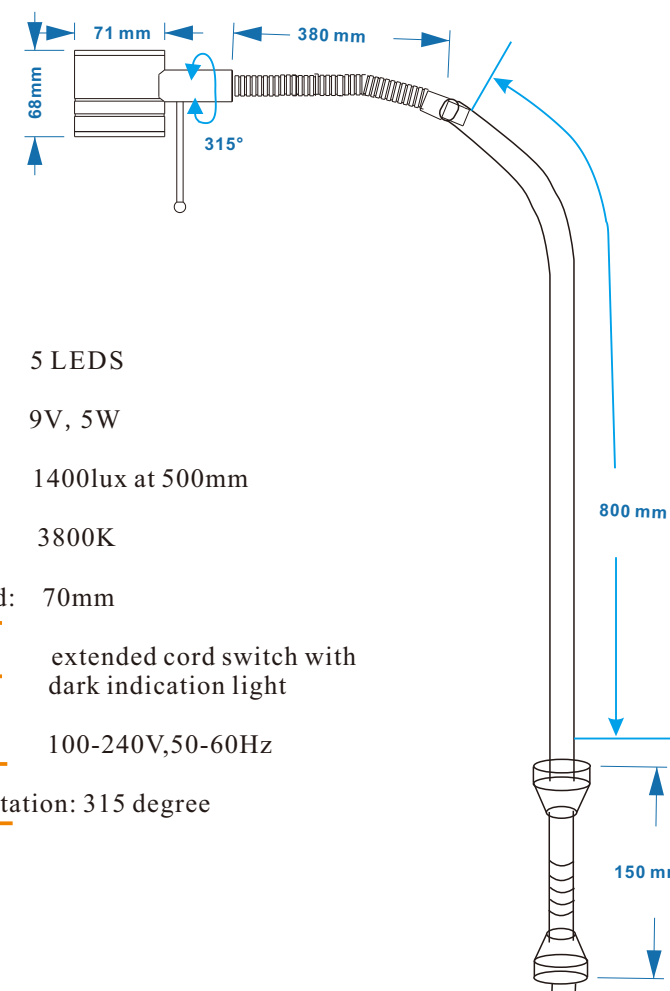

|                             |   |
|-----------------------------|---|
| Light source:               | 5 LEDS  |
| Output :                    | 9V, 5W  |
| Light illumination:         | 1400lux at 500mm                                |
| Color temperature:          | 3800K   |
| Diameter of lamphead:       | 70mm  |
| Switch:                     | extended cord switch with dark indication light |
| Electrical mains:           | 100-240V,50-60Hz                                |
| Angle of lamphead rotation: | 315 degree                                      |